


M2 Attachments

ISO 606

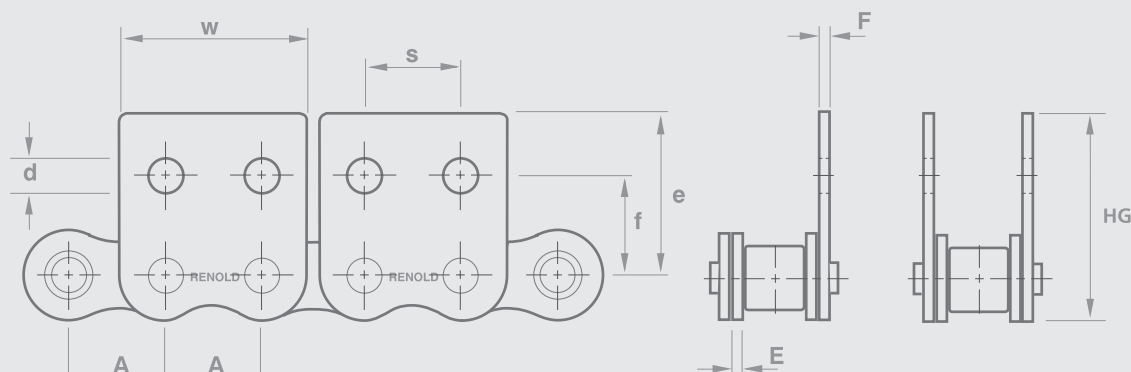

Chain Ref.		Technical Details (mm)										
Renold Chain No.	ISO Ref.	Pitch (inch)	Pitch (mm)					Min				
1161	04	0.236	6.000	0.57	0.57	10.0	6.8	2.3	2.5	11.1	6.0	12.5
05B1	05B	0.315	8.000	0.73	0.73	11.9	8.6	2.3	3.4	14.8	8.0	15.3
06B1*	06B	0.375	9.525	1.25	1.00	14.5	10.1	3.3	4.1	17.6	9.5	18.5
08B1 ■	08B	0.500	12.700	1.5	1.5	20.8	13.0	4.3	5.8	24.4	12.7	26.6
10B1 ■	10B	0.625	15.875	1.5	1.5	24.9	16.5	5.3	6.8	29.9	15.8	31.7
12B1 ■	12B	0.750	19.050	1.76	1.76	28.2	21.0	6.6	8.1	35.4	19.0	36.3
16B1 ■	16B	1.000	25.400	3.70	3.00	39.7	23.0	6.6	10.25	46.2	25.4	50.0
20B1	20B	1.250	31.750	4.40	3.7	47.5	30.5	8.4	12.5	57.0	31.7	60.0
24B1	24B	1.500	38.100	6.0	5.00	61.5	42.7	10.5	16.7	71.5	38.1	78.2

* Straight plate ■ Available with our 24, 48 & 72 Hour Fast Turnaround Service

For further information:

t: +44 (0) 161 498 4600
f: +44 (0) 161 498 4565
e: enquiry@renold.com
w: www.renold.com

Also available
from Renold

Chain Wear Guide
Page 85



Measure chain
extension easily



Roll-Ring Page 65
Chain tensioner