


Toleranser enligt DIN 3771 del 1 eller ISO 3601/1

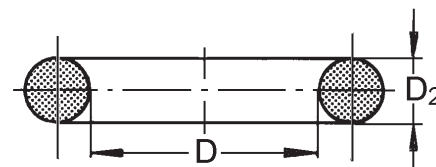

Inner diameter D				Tolerans	Inner diameter D				Tolerans	Inner diameter D				Tolerans
				±					±					±
1.8	-	2.79		0.13	75.0	-	77.49		0.66	272	-	279.9		2.02
2.8	-	4.86		0.14	77.5	-	79.99		0.67	280	-	289.9		2.08
4.87	-	6.69		0.15	80.0	-	82.49		0.69	290	-	299.9		2.14
6.7	-	8.75		0.16	82.5	-	84.99		0.71	300	-	306.9		2.21
8.76	-	10.59		0.17	85.0	-	87.49		0.73	307	-	314.9		2.25
10.6	-	11.79		0.18	87.5	-	89.99		0.75	315	-	324.9		2.30
11.8	-	14.99		0.19	90.0	-	92.49		0.77	325	-	334.9		2.37
15.0	-	16.99		0.20	92.5	-	94.99		0.79	335	-	344.9		2.43
17.0	-	18.99		0.21	95.0	-	97.49		0.81	345	-	354.9		2.49
19.0	-	21.19		0.22	97.5	-	99.99		0.83	355	-	364.9		2.56
21.2	-	22.39		0.23	100	-	102.9		0.84	365	-	374.9		2.62
22.4	-	24.99		0.24	103	-	105.9		0.87	375	-	386.9		2.68
25.0	-	25.79		0.25	106	-	108.9		0.89	387	-	399.9		2.76
25.8	-	27.99		0.26	109	-	111.9		0.91	400	-	411.9		2.84
28.0	-	29.99		0.28	112	-	114.9		0.93	412	-	424.9		2.91
30.0	-	31.49		0.29	115	-	117.9		0.95	425	-	436.9		2.99
31.5	-	32.49		0.31	118	-	121.9		0.97	437	-	449.9		3.07
32.5	-	34.49		0.32	122	-	124.9		1.00	450	-	461.9		3.15
34.5	-	35.49		0.33	125	-	127.9		1.03	462	-	474.9		3.22
35.5	-	36.49		0.34	128	-	131.9		1.05	475	-	486.9		3.30
36.5	-	37.49		0.35	132	-	135.9		1.08	487	-	499.9		3.37
37.5	-	38.69		0.36	136	-	139.9		1.10	500	-	514.9		3.45
38.7	-	39.99		0.37	140	-	144.9		1.13	515	-	529.9		3.54
40.0	-	41.19		0.38	145	-	149.9		1.17	530	-	544.9		3.63
41.2	-	42.49		0.39	150	-	154.9		1.20	545	-	559.9		3.72
42.5	-	43.69		0.40	155	-	159.9		1.24	560	-	579.9		3.81
43.7	-	44.99		0.41	160	-	164.9		1.27	580	-	599.9		3.93
45.0	-	46.19		0.42	165	-	169.9		1.31	600	-	614.9		4.05
46.2	-	47.49		0.43	170	-	174.9		1.34	615	-	629.9		4.13
47.5	-	48.69		0.44	175	-	179.9		1.38	630	-	649.9		4.22
48.7	-	49.99		0.45	180	-	184.9		1.41	650	-	669.9		4.34
50.0	-	51.49		0.46	185	-	198.9		1.44	670	-	689.9		4.46
51.5	-	52.99		0.47	190	-	194.9		1.48	≥690				0.65%
53.0	-	54.49		0.48	195	-	199.9		1.51					
54.5	-	55.99		0.50	200	-	205.9		1.55					
56.0	-	57.99		0.51	206	-	211.9		1.59					
58.0	-	59.99		0.52	212	-	217.9		1.63					
60.0	-	61.49		0.54	218	-	223.9		1.67					
61.5	-	62.99		0.55	224	-	229.9		1.71					
63.0	-	64.99		0.56	230	-	235.9		1.75					
65.0	-	66.99		0.58	236	-	242.9		1.79					
67.0	-	68.99		0.59	243	-	249.9		1.83					
69.0	-	70.99		0.61	250	-	257.9		1.88					
71.0	-	72.99		0.63	258	-	264.9		1.93					
73.0	-	74.99		0.64	265	-	271.9		1.98					

Tvärsnitts diameter D ₂				Tolerans
				±
≤2.62	-			0.08
>2.62	-	3.0		0.09
>3.00	-	4.5		0.10
>4.50	-	5.5		0.13
>5.50	-	7.5		0.15
>7.50	-	8.5		0.18
>8.50	-	10.0		0.20