


Toleranser enligt DIN 3771 del 1 eller ISO 3601/1

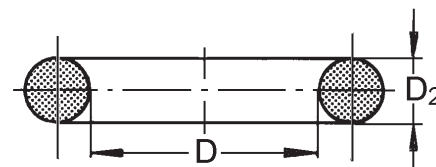

Inner diameter D				Tolerans	
				±	
1.8	-	2.79	0.13	75.0	- 77.49 0.66
2.8	-	4.86	0.14	77.5	- 79.99 0.67
4.87	-	6.69	0.15	80.0	- 82.49 0.69
6.7	-	8.75	0.16	82.5	- 84.99 0.71
8.76	-	10.59	0.17	85.0	- 87.49 0.73
10.6	-	11.79	0.18	87.5	- 89.99 0.75
11.8	-	14.99	0.19	90.0	- 92.49 0.77
15.0	-	16.99	0.20	92.5	- 94.99 0.79
17.0	-	18.99	0.21	95.0	- 97.49 0.81
19.0	-	21.19	0.22	97.5	- 99.99 0.83
21.2	-	22.39	0.23	100	- 102.9 0.84
22.4	-	24.99	0.24	103	- 105.9 0.87
25.0	-	25.79	0.25	106	- 108.9 0.89
25.8	-	27.99	0.26	109	- 111.9 0.91
28.0	-	29.99	0.28	112	- 114.9 0.93
30.0	-	31.49	0.29	115	- 117.9 0.95
31.5	-	32.49	0.31	118	- 121.9 0.97
32.5	-	34.49	0.32	122	- 124.9 1.00
34.5	-	35.49	0.33	125	- 127.9 1.03
35.5	-	36.49	0.34	128	- 131.9 1.05
36.5	-	37.49	0.35	132	- 135.9 1.08
37.5	-	38.69	0.36	136	- 139.9 1.10
38.7	-	39.99	0.37	140	- 144.9 1.13
40.0	-	41.19	0.38	145	- 149.9 1.17
41.2	-	42.49	0.39	150	- 154.9 1.20
42.5	-	43.69	0.40	155	- 159.9 1.24
43.7	-	44.99	0.41	160	- 164.9 1.27
45.0	-	46.19	0.42	165	- 169.9 1.31
46.2	-	47.49	0.43	170	- 174.9 1.34
47.5	-	48.69	0.44	175	- 179.9 1.38
48.7	-	49.99	0.45	180	- 184.9 1.41
50.0	-	51.49	0.46	185	- 198.9 1.44
51.5	-	52.99	0.47	190	- 194.9 1.48
53.0	-	54.49	0.48	195	- 199.9 1.51
54.5	-	55.99	0.50	200	- 205.9 1.55
56.0	-	57.99	0.51	206	- 211.9 1.59
58.0	-	59.99	0.52	212	- 217.9 1.63
60.0	-	61.49	0.54	218	- 223.9 1.67
61.5	-	62.99	0.55	224	- 229.9 1.71
63.0	-	64.99	0.56	230	- 235.9 1.75
65.0	-	66.99	0.58	236	- 242.9 1.79
67.0	-	68.99	0.59	243	- 249.9 1.83
69.0	-	70.99	0.61	250	- 257.9 1.88
71.0	-	72.99	0.63	258	- 264.9 1.93
73.0	-	74.99	0.64	265	- 271.9 1.98

Tvärsnitts diameter D ₂		Tolerans ±	
≤2.62	-	0.08	
>2.62	-	3.0	
>3.00	-	4.5	
>4.50	-	5.5	
>5.50	-	7.5	
>7.50	-	8.5	
>8.50	-	10.0	