


Straight Side Plate

ISO 606

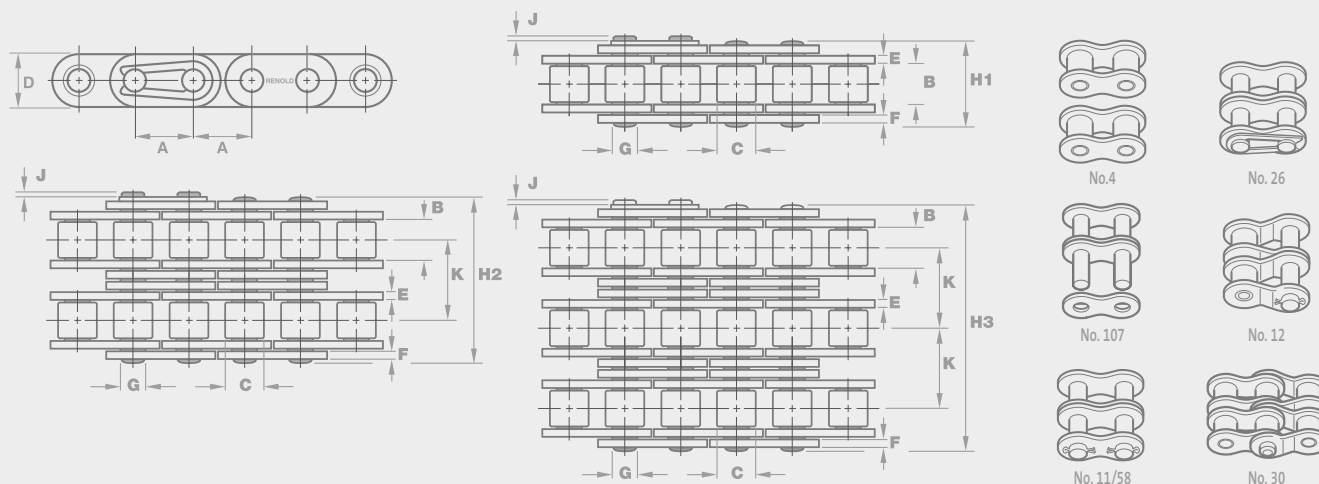

Chain Ref.		Technical Details (mm)												Connecting Links	
Renold Chain No.	ISO Ref.	Pitch (inch)	Pitch (mm)	Inside Width	Roller Diam.	Plate Height	Plate Width Inner	Plate Width Outer	Pin Diam.	Pin Length	Conn. Link Extension	Transverse Pitch	ISO606 Tensile Strength (NEWTONS)	Weight kg/m	
					MIN	MAX	MAX	MAX	MAX	MAX	MAX	NOM	MIN		

Simplex

		A	A	B	C	D	E	F	G	H1	J	K			
08B1GF	08B-1	0.500	12.70	7.75	8.51	11.81	1.55	1.55	4.45	17.0	3.9	-	17800	0.70	4 107 11 26 58 12 30
10B1GF	10B-1	0.625	15.88	9.65	10.16	14.70	1.55	1.55	5.08	19.6	4.1	-	22200	0.92	4 107 11 26 58 12 30
12B1GF	12B-1	0.750	19.05	11.68	12.07	15.93	1.80	1.80	5.72	22.7	4.6	-	28900	1.20	4 107 11 26 58 12
16B1GF	16B-1	1.000	25.40	17.02	15.88	20.2	4.12	3.10	8.28	36.1	5.4	-	60000	3.45	4 107 26
20B1GF	20B-1	1.250	31.750	19.56	19.05	26.42	4.62	3.61	10.19	39.8	2.7	-	95000	3.85	4 107 26 12
24B1GF	24B-1	1.500	38.10	25.40	25.40	35.75	6.10	5.08	14.63	53.4	6.6	-	160000	7.45	4 107 26
28B1GF	28B-1	1.750	44.45	30.99	27.94	41.68	7.62	6.35	15.90	65.1	7.4	-	200000	9.35	4 107 26
32B1GF	32B-1	2.000	50.80	30.99	29.21	47.60	7.11	6.35	17.81	67.4	7.9	-	250000	10.10	4 107 26

Duplex

		A	A	B	C	D	E	F	G	H1	J	K			
08B2GF	08B-2	0.500	12.70	7.75	8.51	11.81	1.55	1.55	4.45	31.0	3.9	13.92	31000	1.38	4 107 11 26 58 12 30
10B2GF	10B-2	0.625	15.88	9.65	10.16	14.70	1.55	1.55	5.08	36.2	4.1	16.59	44500	1.80	4 107 11 26 58 12 30
12B2GF	12B-2	0.750	19.05	11.68	12.07	15.93	1.80	1.80	5.72	42.2	4.6	19.46	57800	2.40	4 107 11 26 58 12 30
16B2GF	16B-2	1.000	25.40	17.02	15.88	20.2	4.12	3.10	8.28	68.0	5.4	31.88	106000	5.50	4 107 26
20B2GF	20B-2	1.250	31.750	19.56	19.05	26.42	4.62	3.61	10.19	76.7	2.7	36.45	170000	7.80	4 107 26 12
24B2GF	24B-2	1.500	38.10	25.40	25.40	35.75	6.10	5.08	14.63	101.8	6.6	48.36	280000	14.80	4 107 26

For further information:


t: +44 (0) 161 498 4600

f: +44 (0) 161 498 4565


e: enquiry@renold.com

w: www.renold.com

Also available
from Renold



Roll-Ring Page 65
Chain tensioner



Sprockets Page 68
For roller chain use



Chain Wear Guide
Page 85

Measure chain
extension easily